

## Generator set data sheet



**Model:** C1760 D5E  
**Frequency:** 50  
**Fuel type:** Diesel

<b>Spec sheet:</b>	<b>SS17-CPGK</b>
<b>Noise data sheet (open):</b>	<b>ND50-OSHHP</b>
<b>Airflow data sheet:</b>	<b>AF50-HHP</b>
<b>Derate data sheet (open):</b>	<b>DD50-OSHHP</b>
<b>Transient data sheet:</b>	<b>RTF</b>

<b>Fuel consumption</b>	<b>Standby</b>				<b>Prime</b>			
	<b>kVA (kW)</b>				<b>kVA (kW)</b>			
<b>Ratings</b>	1760 (1408)				1600 (1280)			
<b>Load</b>	<b>1/4</b>	<b>1/2</b>	<b>3/4</b>	<b>Full</b>	<b>1/4</b>	<b>1/2</b>	<b>3/4</b>	<b>Full</b>
<b>US gph</b>	31.7	55.9	80.0	104	29.8	51.9	74.1	96.3
<b>L/hr</b>	120	212	303	395	113	197	281	365

<b>Engine</b>	<b>Standby rating</b>	<b>Prime rating</b>
Engine manufacturer	Cummins	
Engine model	QSK60-GS3	
Configuration	Cast iron, 60 ° V16 cylinder	
Aspiration	Turbocharged and low temperature aftercooled	
Gross engine power output, kWm	1835	1620
BMEP at set rated load, kPa	2434	2193
Bore, mm	159	
Stroke, mm	190	
Rated speed, rpm	1500	
Piston speed, m/s	9.5	
Compression ratio	16.2:1	
Lube oil capacity, L	378	
Overspeed limit, rpm	1725 ±50	
Regenerative power, kW	146	
Governor type	Electronic	
Starting voltage	24V Volts DC	

<b>Fuel flow</b>	
Maximum fuel flow, L/hr	1630
Maximum fuel inlet restriction, mm Hg	203
Maximum fuel inlet temperature, °C	70

<b>Air</b>	<b>Standby rating</b>	<b>Prime rating</b>
Combustion air, m <sup>3</sup> /min	139	125
Maximum air cleaner restriction, kPa	6.2	

## Exhaust

Exhaust gas flow at set rated load, m <sup>3</sup> /min	320	295
Exhaust gas temperature, °C	477	452
Maximum exhaust back pressure, kPa	6.7	

## Standard set-mounted radiator cooling

Ambient design, °C	27	
Fan load, kW <sub>m</sub>	33	
Coolant capacity (with radiator), L	580	
Cooling system air flow, m <sup>3</sup> /sec @ 12.7 mmH <sub>2</sub> O	40	
Total heat rejection, Btu/min		
Maximum cooling air flow static restriction mm H <sub>2</sub> O	12.7	

## Weights\*

	<b>Open</b>
Unit dry weight kgs	15072
Unit wet weight kgs	15736


\* Weights represent a set with standard features. See outline drawing for weights of other configurations.

## Dimensions

	<b>Length</b>	<b>Width</b>	<b>Height</b>
Standard open set dimensions	6175	2494	3422

## Genset outline

### Open set

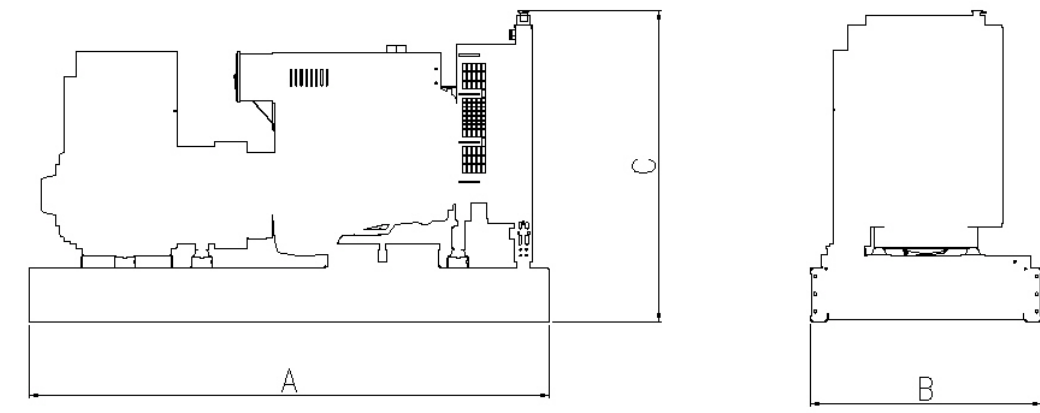

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

## Alternator data

Connection	Temp rise °C	Duty	Alternator	Voltage
Wye, 3-phase	125/105	S/P	LVP7D	400-416V

## Ratings definitions

Emergency standby power (ESP):	Limited-time running power (LTP):	Prime power (PRP):	Base load (continuous) power (COP):
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) is in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

## Formulas for calculating full load currents:

### Three phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$$

### Single phase output

$$\frac{\text{kW} \times \text{SinglePhaseFactor} \times 1000}{\text{Voltage}}$$

### See your distributor for more information.

Cummins Power Generation  
 Manston Park, Columbus Avenue  
 Manston, Ramsgate  
 Kent CT12 5BF, UK  
 Telephone: +44 (0) 1843 255000  
 Fax +44 (0) 1843 255902  
 E-mail: [cpg.uk@cummins.com](mailto:cpg.uk@cummins.com)  
 Web: [www.cumminspower.com](http://www.cumminspower.com)



[cumminspower.com](http://cumminspower.com)

### Our energy working for you.™

©2015 Cummins Power Generation Inc. All rights reserved.  
 Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand, AmpSentry, InPower and "Our energy working for you." are trademarks of Cummins Power Generation. Other company, product, or service names may be trademarks or service marks of others. Specifications are subject to change without notice.  
 DS49e-CPGK- (2/15)