



» Generator set data sheet

Model: C700 D5
Frequency: 50
Fuel Type: Diesel

Spec sheet:	SS12-CPGK
Noise data sheet (Open/enclosed):	ND50-OSHHP / ND50-CS550
Airflow data sheet:	AF50-HHP
Derate data sheet (Open/enclosed):	DD50-OSHHP / DD50-CSHHP
Transient data sheet:	TD50-HHP

	Standby				Prime			
	kVA (kW)				kVA (kW)			
Fuel consumption								
Ratings	706 (565)				640 (512)			
Load	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
gph	10.8	17.6	25.1	33.8	9.5	16.0	22.9	30.8
L/hr	49.0	80.0	114.0	154.0	43.0	73.0	104.0	140.0

	Standby Rating		Prime Rating	
	kVA (kW)		kVA (kW)	
Engine				
Engine manufacturer	Cummins			
Engine model	VTA28-G5			
Configuration	Cast Iron, 40° V12 Cylinder			
Aspiration	Turbo Charged and After-Cooled			
Gross engine power output, kWm	612		560	
BMEP at set rated load, kPa	1751		1599	
Bore, mm	140			
Stroke, mm	152			
Rated speed, rpm	1500			
Piston speed, m/s	7.6			
Compression ratio	13.1:1			
Lube oil capacity, L	83			
Overspeed limit, rpm	1850 ±50			
Regenerative power, kW	75			
Governor type	Electronic			
Starting voltage	24 Volts DC			

Fuel flow	
Maximum fuel flow, L/hr	337
Maximum fuel inlet restriction, mm Hg	203
Maximum fuel inlet temperature (°C)	70

Air	Standby Rating	Prime Rating
Combustion air, m ³ /min	52.60	49.50
Maximum air cleaner restriction, kPa	6.2	

Exhaust		
Exhaust gas flow at set rated load, m ³ /min	122.8	119.1
Exhaust gas temperature, °C	507.2	493.3
Maximum exhaust back pressure, kPa	10.2	

Standard set-mounted radiator cooling		
Ambient design, °C	40	
Fan load, KW _m	19.6	
Coolant capacity (with radiator), L	125	
Cooling system air flow, m ³ /sec @ 12.7mmH ₂ O	12.45	
Total heat rejection, BTU/min	21610	19310
Maximum cooling air flow static restriction mmH ₂ O	19.1	


Weights*	Open	Enclosed
Unit dry weight kgs	5491	RTF
Unit wet weight kgs	5760	RTF

* Weights represent a set with standard features. See outline drawing for weights of other configurations


Dimensions	Length	Width	Height
Standard open set dimensions	4047	1608	1942
Enclosed set standard dimensions	RTF	RTF	RTF

Genset outline

Open set

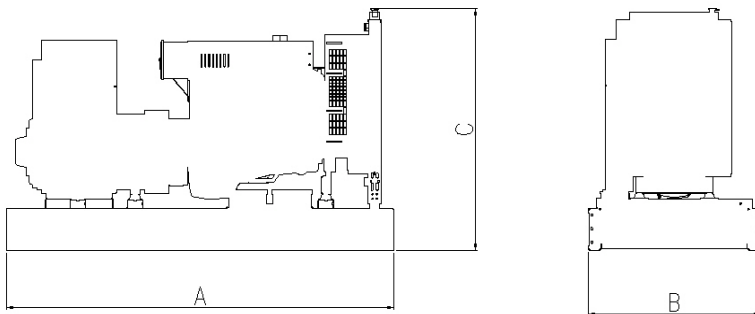

Enclosed set

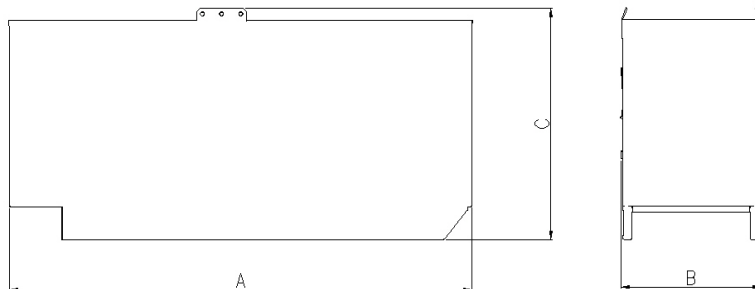

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

Alternator data

Connection ¹	Temp rise °C	Duty ²	Alternator	Voltage
Wye, 3 Phase	150/125C	S/P	HC6G	380-440V
Wye, 3 Phase	150/125C	S/P	HC5F	380-415V

Ratings definitions

Emergency Standby Power (ESP)	Limited-Time running Power (LTP):	Prime Power (PRP)	Base Load (Continuous) Power (COP)
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

Formulas for calculating full load currents

Three phase output

$$\frac{kW \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$$

Single phase output

$$\frac{kW \times \text{Single Phase Factor} \times 1000}{\text{Voltage}}$$

See your distributor for more information.

Advanced Diesel Engineering Ltd
 14 Langthwaite Business Park,
 South Kirkby, Pontefract,
 WF9 3AP, UK
 Telephone: +44 (0) 1977 658 100
 Fax: +44 (0) 1977 608 111
 Email: enquiries@adeltd.co.uk
 Web: www.adeltd.co.uk