



ADVANCED

ENERGY GENERATION

ES3000 230/115V 50HZ HUK

LONG RUN ENERGY



A petrol generator designed specifically for intensive operations where performance power is demanded by professional user, over an extended period of time.

Main Features

Frequency	Hz	50
Voltage	V	230
Power factor	cos ϕ	0.9
Phase and connection		1

Power Rating

Standby power LTP	kVA	2.9
Standby power LTP	kW	2.6
Continuous power COP	kVA	2.5
Continuous power COP	kW	2.2

Ratings definition (According to standard ISO8528 1:2005)

COP - Continuous Power: It is defined as being the maximum power which a generating set is capable of delivering continuously for an unlimited number of hours, with the maintenance intervals and procedures being carried out as prescribed by the manufacturers.

LTP - Limited-Time running Power: It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 h of operation per year (whose no more than 300 for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. No overload capability is available.

Engine specifications

Engine manufacturer		Honda
Model		GX160
Engine cooling system		Air
Displacement	cm ³	163
Aspiration		Natural
Operating Speed-Nominal	rpm	3000
Speed governor		Mechanical
Fuel		Petrol
Oil capacity	l	0.6
Starting system		Recoil



Alternator Specifications

Type		Brushless
Class		H
Voltage regulation system		Capacitor
IP protection		23
Poles		2
Frequency	Hz	50
Voltage tolerance	%	+5; -10 (cosφ1)

Dimensional data

Length	(L) mm	623
Width	(W) mm	409
Height	(H) mm	500
Dry weight	Kg	41
Fuel tank capacity	l	11

Autonomy

Running time @ 75% PRP	h	12.50
Running time @ 100% PRP	h	9.40

Noise level

Guaranteed noise level (LWA)	dB(A)	96
Noise pressure level @ 7 mt	dB(A)	68

GENSET CONTROL

COMMANDS


- Selector switch: OFF - ON
- Starting systems: Recoil
- Selector switch 115/230V
- Fuel Cock

PROTECTIONS STANDARD

- Thermal protection
- Oil Guard

SOCKET TYPE

2P+T CEE 115V 16A IP44	1
2P+T CEE 230V 16A IP44	1

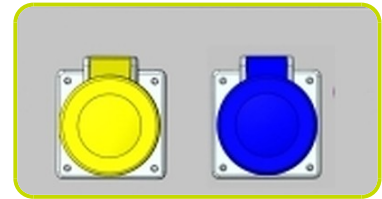

See your distributor for more information.

Advanced Diesel Engineering
14 Langthwaite Business Park,
South Kirkby, Pontefract,
WF9 3AP, UK
Telephone: +44 (0) 1977 658 100
Fax: +44 (0) 1977 608 111
Email: enquiries@adeltd.co.uk
Web: www.adeltd.co.uk

Printed on 19/10/2015 (ID 2484)

©2012 | Advanced Diesel Engineering | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice | ENERGY GENERATION is registered trademarks of PR INDUSTRIAL s.r.l. Other company, product or service names may be trademarks or service marks of others. RevA (06/2012).

