

PMD 5050S



Diesel and soundproof motorization stand for reliability with low operating cost in the maximum comfort. Handle and wheels allow easy move and transportation. Generous fuel tank capacity allows for long continuous running time. Built-in digital multimeter for scheduled maintenance intervals and ensure optimal operating condition. Automatic Voltage Regulator (AVR) allows for tension stability.

FEATURES

- Powermate OHV engine provides consistent power for multiple applications
- Fuel: Diesel
- Starting Systems: Electric (with battery)
- Low-oil level shutdown automatically safeguards engine from damage
- Digital multi meter tracks engine runtime for maintenance intervals
- Fuel gauge allows user to track diesel levels
- AVR Automatic Voltage Regulator
- Equipped with 4 wheels for move and transport easily
- Central lifting point



PERFORMANCE

Frequency	Hz	50
Voltage	V	400/230
Phase		3
Max Power	Watts	3700
Rated Power	Watts	3360

Single Phase Power

Voltage	V	230
Single Phase Max Power	Watts	2700
Single Phase Rated Power	Watts	2520



Engine

Brand	Powermate	
Type	OHV	
Operating Speed Nominal	rpm	3000
Fuel	Diesel	
Starting Systems	Electric	
Oil capacity	l	1.65
Low Oil Shutdown	√	




Alternator

Voltage regulation system	AVR
---------------------------	-----


Dimensional data

Length	(L) mm	910
Width	(W) mm	518
Height	(H) mm	682
Dry weight	Kg	185
Carton box dimension LxWxH	mm	950x570x765

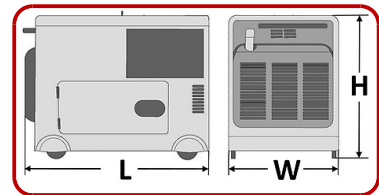

Autonomy

Fuel tank capacity	14.5	
Fuel consumption @ 75%	l/h	1.3
Running time @ 75%	h	11

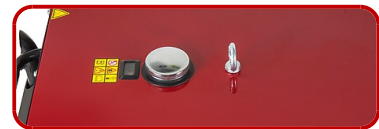

Noise level

Guaranteed noise level (LWA)	dB(A)	97
Noise pressure level @ 7 mt	dB(A)	69

CONTROL PANEL

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

COMMANDS:

- Start selector switch with key: OFF - ON - START

INSTRUMENTATION

- Voltmeter
- Hours-counter
- Frequency meter
- Fuel gauge

PROTECTIONS:

- Thermal Magnetic breaker
- Oil Guard (with lamp)
- Fuse 9A (12V DC)

OUTPUT:

- Battery Charger 12V DC



SOCKET TYPE

SCHUKO 230V 16A IP44	1
3P+N+T CEE 400V 16A IP44	1

The information is aligned with the Data file at the time of download. Printed on 02/07/2018 (ID 6432)

©2018 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice